


Dimensions

XM2203TY-24CR

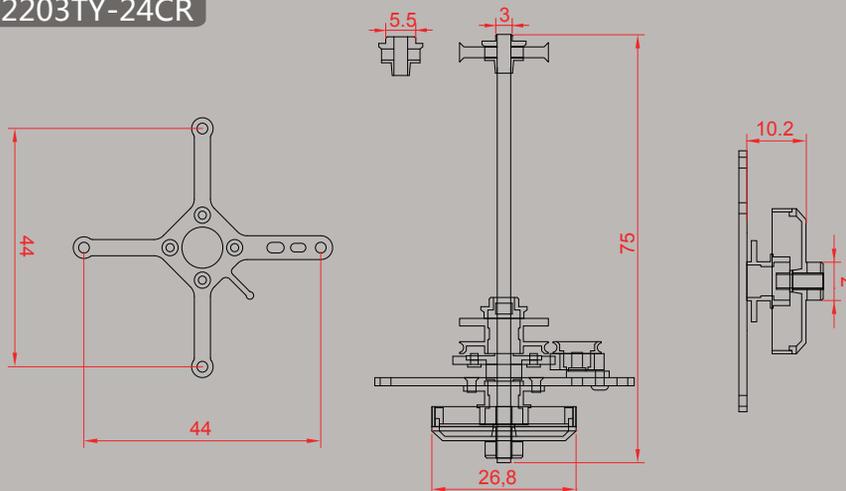

Specification

Xmotor Typhoon Indoor Series Specifications Contra Rotating Editon	XM2203TY-24CR
Item NO. (商品编码)	51303
RPM/V (KV值)	1080 RPM/V
Wiring (配线)	24T, Y wiring
Slots,Poles(极数)	12, 14
Weight w/ wires (重量)	18.0g
Outer Diameter (直径)	27mm
Length (长度)	N/A
Diameter of Shaft (轴径)	2.5mm, carbon fiber
Mounting holes pitch (安装孔距)	44mm/44mm
Idle Current(Io) @10V (空载电流)	0.4A
Resistance(Ri) (电阻)	620mOhm
Cruising power[5 mins] (巡航功率)	17W
Bursts current[15s] (最大电流)	4.1A
Peak power[15s] (峰值功率)	30W
Recommended ESC (调速器)	XC0610BA-V2
Propeller testing data 1 (螺旋桨试验数据1)	PT10x3i ccw&cw 156g, 4.3A@7.4V, 165g, 4.5A@8.1V
Propeller testing data 2 (螺旋桨试验数据2)	GWS 9x4.7(cw&ccw), 187g, 5.34A@7.4V * Good throttle management needed.
Memo (备注)	For up to 130g F3P indoor models